
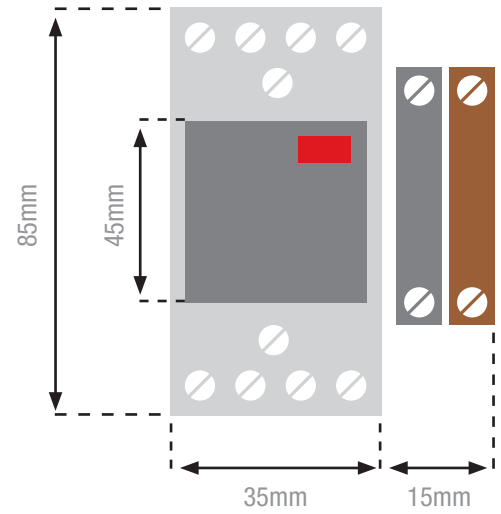


# PRE9030DRF Contactor

## With Fuse Carrier and Through Terminal

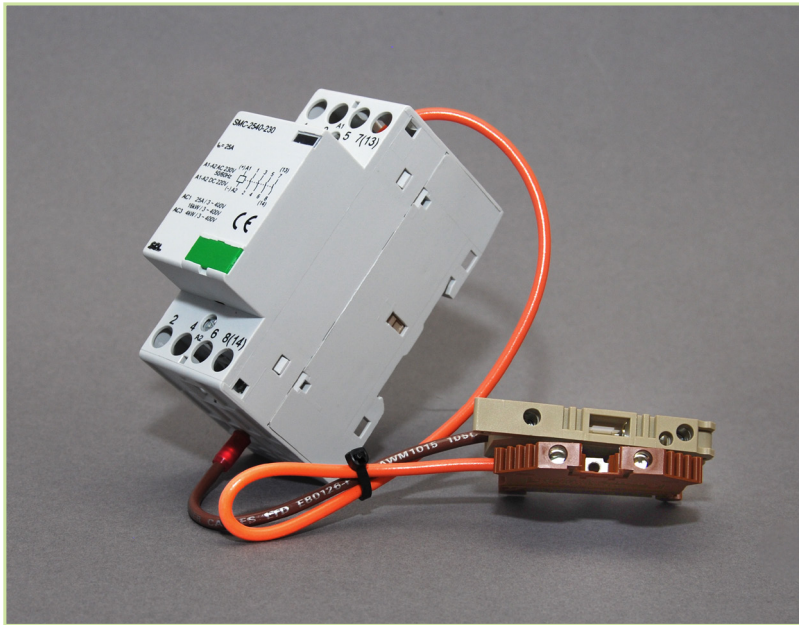

### Unit description:

**SIZE:** Standard two position Din Rail mount with one position under cover for terminals.



**ELECTRICAL SPEC:** 230V-AC 50 Hz

**LOAD:** 25A per pole, Max Load at 230 volts 9kW

**CONNECTIONS:** Live in, Swd. live out, Neutral


**CONFORMANCE:** EMC- 89/336/EEC LVD - 73/23/EEC

CE approved

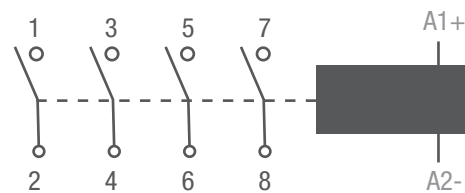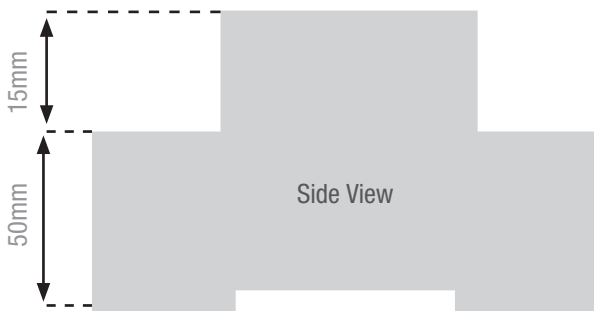

# PRE9030 DRF Wiring layout

Do not exceed stated loading

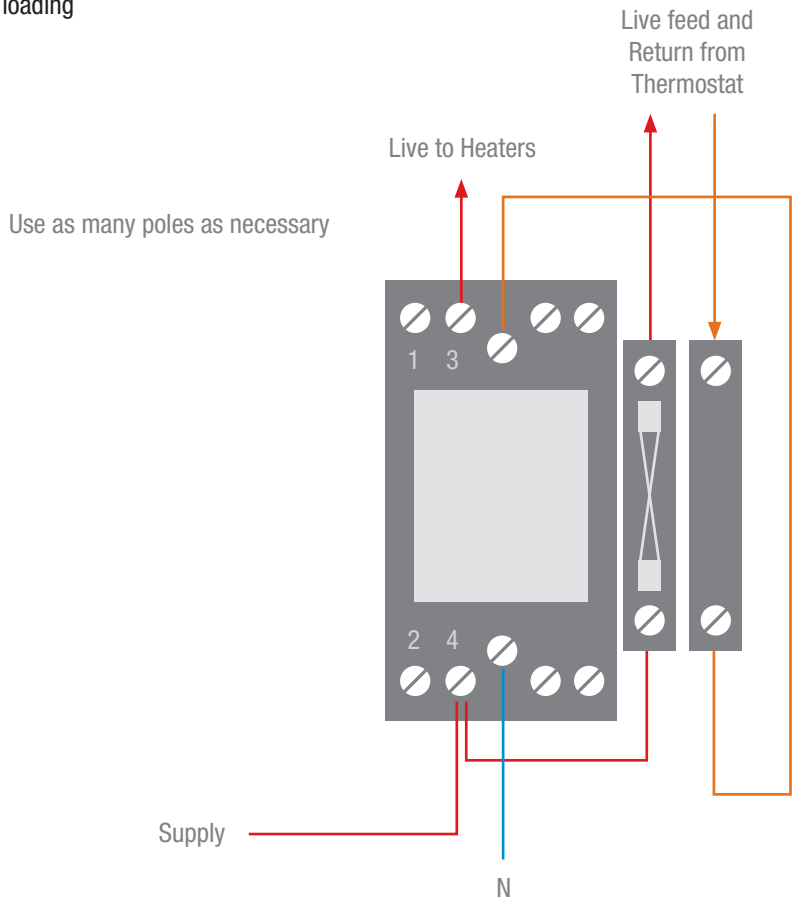

## Typical Wiring Layout PRE5701 7Day Thermostat & PRE9030DRF Contactor

Consumer unit NOT supplied

